

**Part Number:** H-NC7-F(E) & H-NC7-R

**Description:** Front and Rear Saddles

**Fitment:** 2012 Honda NC700X

**Revision:** 1



Tools Required	Parts List
Phillips Screwdriver 5mm Allen wrench	1 Wiring Harness / pigtail 1 #FACC-05 Small Fuse Adapter 1 7.5 AMP Fuse 3 6mm Hex Head Bolts 3 6mm Flat Washers

1. Remove your stock seat. Refer to your owner's manual if necessary.

2. To install the seat without heater unit. Corbin's front seat mounts like stock with a tongue in the front and the two stock bolts at the rear (under the passenger seat). The rear seat mounts to the stock hinge system with included hardware and latches to the stock Honda key lock for fuel tank access.

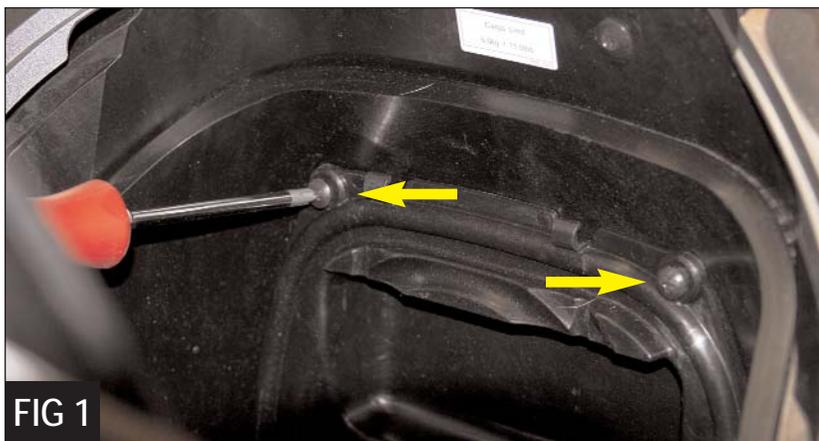


FIG 1

#### Heater Installation:

1. If you ordered the heated model, we also included a wiring harness and fuse adapter that hooks into your stock fuse box.

2. Locate the fuse box. Open the trunk and remove the two bolts on the fusebox/battery cover, using a phillips screwdriver (*Figure 1*).



FIG 2

3. Remove the 7.5 amp clock/turn fuse (*Figure 2*) and discard. Add the provided 7.5 amp fuse to the adapter (*Figure 3*) and put back into the clock/turn fuse position (*Figure 4*).

4. Remove the pin on the top, left side panel, using a Phillips screwdriver (*Figure 5*). Next, remove the three screws on the top, left side panel, using a 5mm Allen wrench (*Figure 6*).

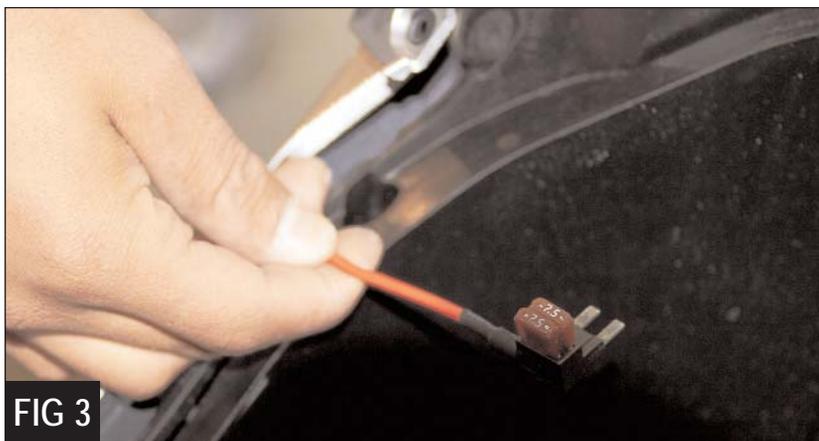


FIG 3

5. Remove the pins on the center panel, using a 5mm Allen wrench (*Figure 7*).

6. Remove the two screws on the lower side panel, using a Phillips screwdriver (*Figure 8*).

7. Pull out the panels, but do not take them completely off. Next route the wiring pigtail down through the side panels and up through the trunk (Figures 9 & 10)

8. Attach the ground wire to the negative terminal on the battery, using a Phillips screwdriver. (Figure 11)

9. Plug the two pigtails together.

10. Re-secure all panels.

11. Plug the wiring harness into the seat and test. To do this, just flip the switch on the saddle. If the switch illuminates, the saddle heater is working.

12. Proceed with saddle mounting as outlined above.

Enjoy your new saddle!

**NOTE:** The heater is controlled by the switch along the side the saddle. The temperature is regulated by an internal thermostat when the heater switch is turned on.

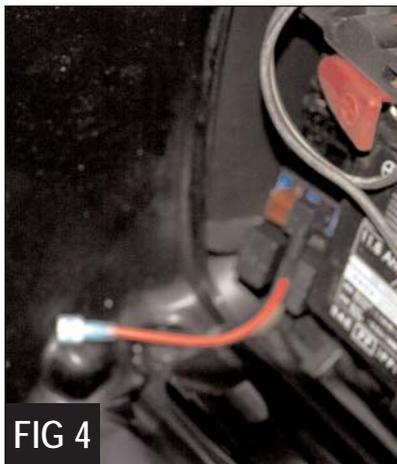


FIG 4



FIG 5



FIG 6



FIG 7



FIG 8

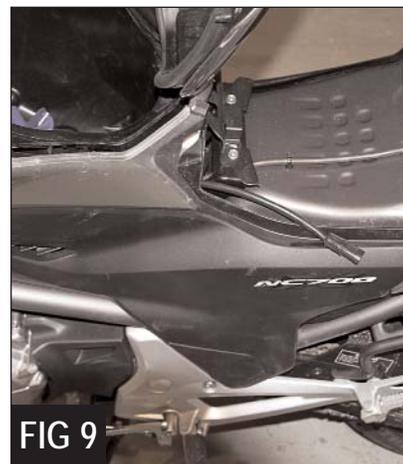


FIG 9



FIG 10

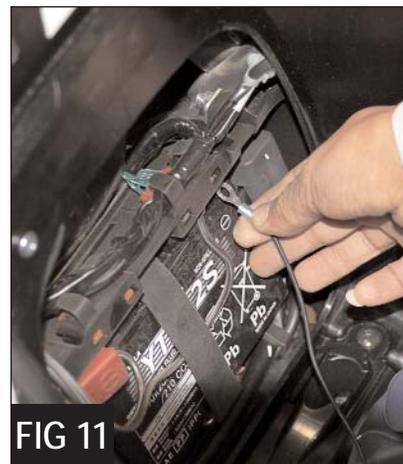


FIG 11

Questions? Give us a holler...  
**800-223-4332**  
[tech@corbin.com](mailto:tech@corbin.com)