

**Part Number:** HUS-TE450-5

**Description:** Dual Sport Saddle

**Fitment:** Husqvarna

**Revision:** 1



Tools Required	Parts List
8mm Socket/combination wrench 10mm Socket/combination wrench 10mm open wrench	1 #A00922 Lock pin mounting bracket 2 6mm x 35 x 1.25 bolts 2 3/16" flat washers 2 10mm nylock nuts

1. Rear of saddle is held down with a latch pin bracket you will install.
2. For easier access, remove the left and right side panels using a 8mm socket/combination wrench. (Figure 1)
3. Remove the two hex head bolts underneath the fender, using a 10mm socket/combination wrench. (Figure 2). Discard bolts. These bolts will not be used again.
4. To install, simply mount the included latch bracket in place as shown in Figure 3 and secure with the supplied bolts, flat washers & nylock nuts, using a 10mm open wrench. Use Loctite® and tighten to 8 ft lbs.
5. Reinstall the side panels.
6. Once the latch pin is installed, slide the saddle into position nose first, align the rear of the seat to the locking mechanism you just installed and push down to latch in place. To remove, use your stock key.

**NOTE:** If your saddle does not latch, it's due to the rubber grommets needing time to break in. To latch your saddle, adjust the latch pin upwards with a washer or two.



FIG 1



FIG 2

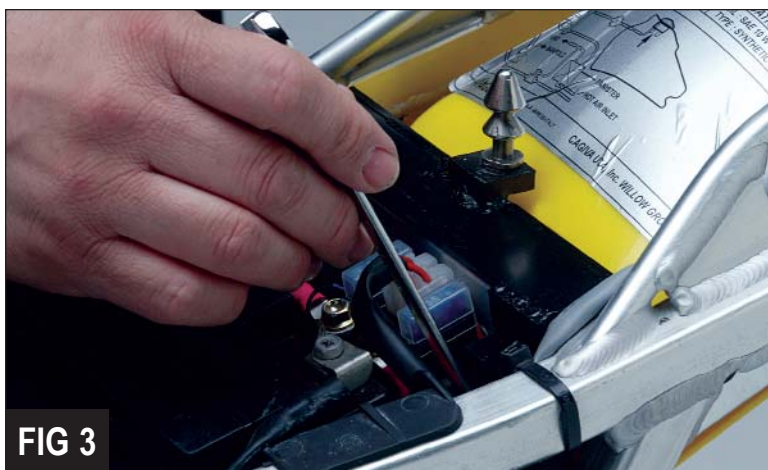


FIG 3

Questions? Give us a holler...  
**800-223-4332**  
tech@corbin.com