

Part Number: S-C109R-FAIR

Description: Fleetliner Fairing

Fitment: 2006 Suzuki Boulevard C109 R

Revision: 2



Tool Required	Parts List
3mm Allen key 5mm Allen key 10mm Open wrench 12mm Open wrench 13mm Open wrench 22mm Open wrench	1 #A01080 Top mounting bracket 1 #A01081 Bottom mounting bracket 2 8m x 20 Hex head bolts 4 8m x 40 x 1.25 Stainless button head Allen bolts 1 8m x 20 x 1.25 Stainless button head Allen bolts 5 5/16" Stainless flat washers 4 8m Fender washers

NOTE: We highly recommend using a medium strength thread lock product, such as Loctite®, on all of the bolts when installing your Corbin Fairing.

1. Remove the turn signal housing, using a 3mm Allen key. (Figure 1)



2. Remove the two hex head bolts holding the turn signal bracket, using a 12mm open wrench (Figure 2). Discard bolts



3. Next, you are going to install the Corbin bottom mounting bracket #A01081. To do so, place the supplied 8m x 20m hex head bolt and 8m flat washer, through the Corbin bracket. Next place another flat washer onto the hex head bolt, then place the hex head bolt through the turn signal bracket. Secure it into place, using a 13mm open wrench, but do not tighten yet. (Figure 3)



In the following steps, we recommend you cover your tank and get a second pair of hands to help hold the handlebars and guard from scratching the paint.

4. Next, you need to move the cable guide out of the way, so you can remove the bolts holding the handlebars to the triple clamp. To do this, remove the two hex head bolts under the triple clamp (Figure 4).

5. Remove the handlebars, using a 22mm (some models 19mm) open wrench (*Figure 5*).

NOTE: The bolts might be on tight, so take caution while removing the bolts.

6. Place the Corbin top mounting bracket onto the triple clamp, then install the handlebars onto the Corbin bracket and secure by using the stock bolts (*Figure 6*). Tighten to 12 ft. lbs. and use Loctite®.

NOTE: Put a little piece of tape onto the washer and rubber grommet, to keep it in place while you install the handlebars onto the Corbin bracket (*Figure 7*).

8. Remove the tape after installing the handlebars.


9. Reinstall the cable guide by reusing the stock bolts.

10. Secure the fairing to the Corbin bracket with the supplied 8m x 40 x 1.25 Allen bolts and flat washer on the side mounting points and a 8m x 20 x 1.25 and flat washer on the middle mounting point (*Figure 8*).

11. Go back and tighten the bottom mounting bracket to 12 ft. lbs.

12. Reinstall the turn signal housing.

13. Take her out for a test drive. Enjoy!

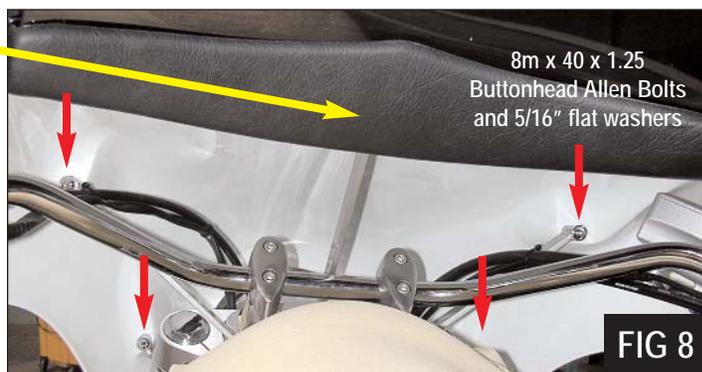

Questions? Give us a holler...
800-223-4332
tech@corbin.com