

**Part Number:** H-18-GW-SMUG

**Description:** Front Seat with Smuggler Trunk

**Fitment:** 2018 Honda Goldwing 1800

**Revision:** 1



Tools Required	Parts List
5mm Allen Wrench 14mm Socket Wrench Phillips Head Screwdriver	1 Wiring Harness 2 #SP01004 m8 x 40 Hex Head Bolts 2 #SP00215 5/16" Flat Washers 1 Zip Tie

**NOTE:** We recommend the use of a thread lock product such as Loctite® when assembling parts on your bike.

1. Remove your stock seat. To do this, start by opening the saddlebags (*Figure 1*) and lower the passenger foot pegs.



FIG 1

2. Remove the side covers by pulling out from the bottom then rotate up to clear the seat (*Figure 2*).



FIG 2

3. Remove the stock 8mm bolt from the front of the seat, using a 5mm Allen wrench (*Figure 3*).

4. Repeat on the other side.

5. Remove the stock bolts and flat washers on the chassis (*Shown in Figure 4*), using a 12mm socket or open wrench.

6. Using a phillips screwdriver, connect the negative wire (black) to the negative accessory terminal, then connect the positive wire with inline fuse to the positive accessory terminal (red). *Figure 5*



FIG 3



7. Route the wiring harness under the subframe and zip tie the excess wire (*Figure 6*).

8. Plug the wiring harness you just installed on the bike into the plug on the Corbin seat.

9. Once you determined the heater is working properly, lower the front end into place and secure the front of your seat with the stock bolts and then secure the smuggler trunk with the supplied bolts and flat washers (Figure 7).

10. Replace the side covers.

**NOTE:** Corbin's heated saddle will shut off when your bike isn't in use.

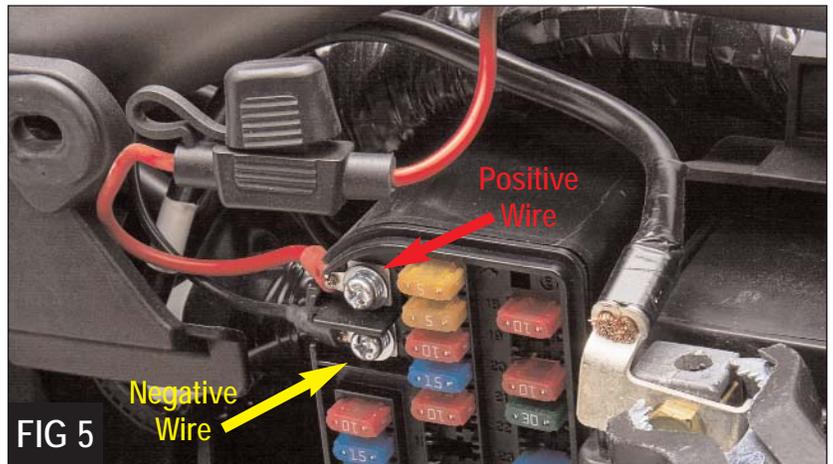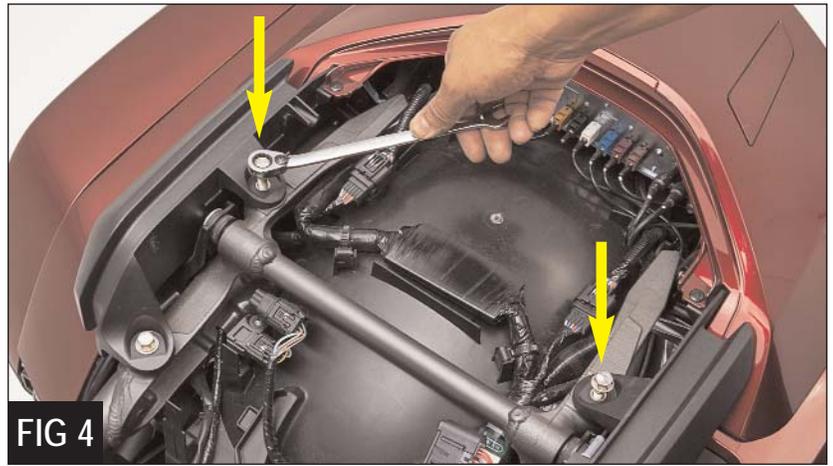

Questions? Give us a call!  
**800-223-4332**  
daytona@corbin.com