

Part Number: H-FURY-S & H-FURY-P

Description: Solo Saddle & Pillion

Fitment: 2009 Honda Fury

Revision: 1



Tools Required	Parts List
10mm socket or combination wrench 5mm Allen wrench 7/16" open wrench Loctite® or similar	1 #A01074 Mounting locking bracket 1 #P11015 Latch pin 1 #P00545 Latch pin cup 2 m6 x 40 mm socket head Allen bolts 2 6mm Hex head bolts 2 6mm Chrome flat washers

NOTE: We highly recommend using a medium strength thread lock product, such as Loctite®, on all of the bolts when installing your Corbin saddle.

1. To install your new Corbin saddle, you're first going to have to remove the stock seat.

2. Locate the holes in your bikes frame (Figure 1).



FIG 1

3. Install the Corbin locking bracket in the location in Figure 1 and secure with the supplied m6 x 40mm socket head Allen bolts (Figure 2). Tighten to 12 ft. lbs.

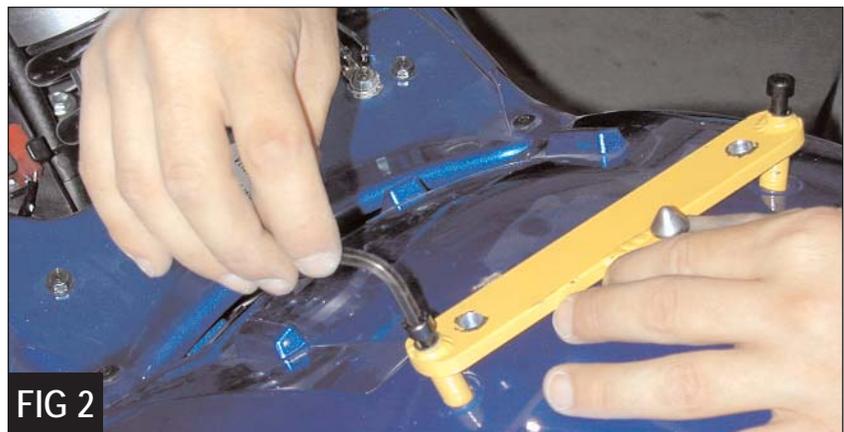


FIG 2

4. Next, for the pillion seat, install the latch pin and latch pin cup on the rear fender, using a 7/16 open wrench (Figure 3).

5. To install the pillion seat, first place the two front brackets under the solo seat locking bracket (Figure 4), then push back to engage into the rear latch pin (Figure 5).



FIG 3

6. Next, secure the pillion to the solo seat locking bracket with the supplied 6mm hex head bolts and 6mm flat washers, using a 10mm socket wrench (Figure 6). Tighten to 12 ft. lbs.

7. To install your Solo saddle, simply slide the two front tongues under the chassis then lower onto the latch pin and push down to secure (Figure 7). To remove, just turn the key on the side of the bike to release the lock.



Questions? Give us a holler...
800-223-4332
tech@corbin.com