

Part Number: S-C109-8-DT(E)

Description: Dual Touring Saddle

Fitment: 2008-1009 Suzuki Boulevard C109 R

Revision: 1




Tools Required	Parts List
Phillips Screwdriver Side cutters or scissors (for trimming zip ties)	1 #CB-PWR-HRN-36=02 Wiring Harness / pigtail 2 8" zip ties 1 #FACC-05 Small Fuse Adapter 1 #Fuse-B-L Fuse box rain cover

1. Remove your stock seat. Refer to your owner's manual if necessary.
2. To install the seat without heater unit. Slip the front tongue of your dual touring saddle into the bracket at the rear of the gas tank. Align the rear of the seat to the rear of the fender and secure by using the stock bolt. The rear mounting bracket is adjustable if needed.

Heater Installation:

For safety considerations, we recommend disconnecting the positive lead from the battery terminal while working on your motorcycle.

1. If you ordered the heated model, we also included a wiring pigtail that hooks into your stock fuse box, so start by removing the fuse box cover.
2. Remove the 10amp fuse from the SIGNAL position (*Figure 1*) and insert the fuse into the adapter at the end of the wiring pigtail (*Figure 2*).
3. Insert the adapter into the fuse box into the space previously occupied by the signal fuse (*Figure 3*).
4. With the pigtail in place, the stock cover will not go back onto your fuse box. Replace the cover loosely then cover the entire fuse box with the included rain cover (*Figure 4*).

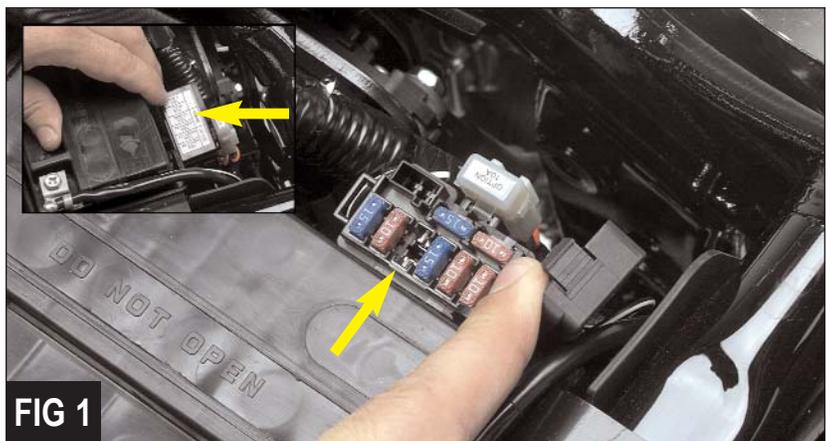

5. Remove the battery cover and hook the negative lead to the negative battery terminal (Figure 5).

6. Bundle loose wiring and secure with included zip ties (Figure 6). Do not tighten excessively or you may damage the wiring... just secure it in place for cleanliness.

7. Be sure you have left enough wire on the pigtail to reach the seat (Figure 7).

8. Plug in each seat and test. To do this, just plug the pigtail into the seat, turn on your ignition switch and flip the switch on the saddle. If the switch illuminates, the saddle heater is working.

9. Proceed with saddle mounting as outlined above.

Enjoy your new saddle!

NOTE: The heater is controlled by the switch along the side the saddle. The temperature is regulated by an internal thermostat when the heater switch is turned on.

SURFACE TEMPERATURE PERFORMANCE

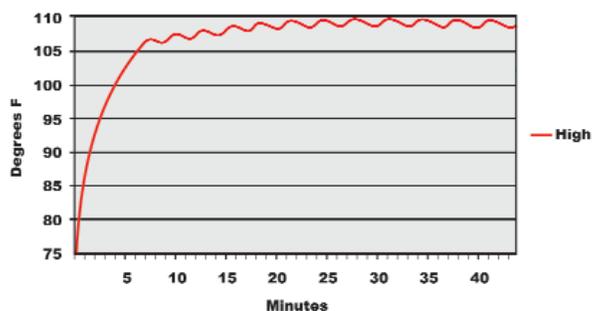


FIG 4



FIG 5



FIG 6



FIG 7

Questions? Give us a holler...
800-223-4332
tech@corbin.com