

**Part Number:** H-NC7-21-F(E) & H-NC7-21-R

**Description:** Front & Rear Saddle

**Fitment:** 2021-2022 Honda NC 750X

**Revision:** 1



Tools Required	Parts List
Phillips Screwdriver or 10mm Combination Wrench	1 Wiring Harness Fuse Link 12" 1 Zip Tie

1. Remove your stock seat. Refer to your owner's manual if necessary.

2. To install the seat without heater unit. Corbin's front seat mounts like stock with a tongue in the front and the two stock bolts at the rear (under the passenger seat). The rear seat mounts to the stock hinge system with included hardware and latches to the stock Honda key lock for fuel tank access.



FIG 1

#### Heater Installation:

1. If you ordered the heated model, we also included a wiring pigtail. This is a one time installation that can stay on the bike even when you remove the saddle.

2. Open the trunk and remove the five push pins on the fusebox/battery cover, using a small Allen wrench or pick (Figure 1). Remove cover.

3. Next connect the pigtail directly to your battery.



FIG 2

4. Connect as follows:

- Disconnect negative lead from battery.
- Disconnect positive lead from battery and reinstall along with red (fuse) lead from pigtail .
- Reconnect negative lead along with black lead of pigtail.
- Assure both terminals are tightened securely (Figure 2).



FIG 3

5. Feed the included pigtail through the trunk (Figure 3) and out through the back (Figure 4).

6. Next, lift up the flap (*Figure 5*), route the pigtail down the side of the frame (*Figure 6*) and out towards the middle (*Figure 7*). Re-tuck flap.


7. If necessary, bundle loose wiring and secure with the included zip tie. Do not tighten excessively or you may damage the wiring... just secure it in place for cleanliness.

8. Next, plug the pigtail into the seat wiring. Turn the ignition switch on and flip on the seat heater. If the heater switch illuminates, then your wiring is fine and you're ready to move on.

**NOTE:** Saddle features a digital timer to automatically shut down the heater after one-hour in case it is forgotten when parking the bike.

9. Proceed with saddle mounting as outlined above.

Enjoy your new saddle!

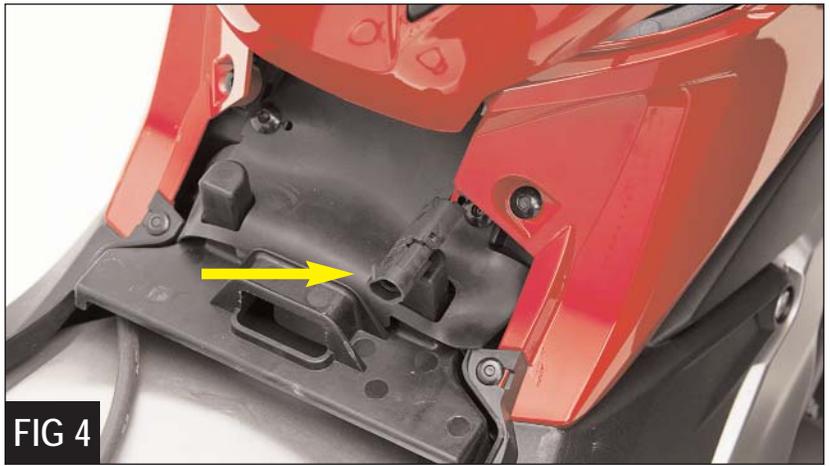

Questions? Give us a holler...  
**800-223-4332**  
tech@corbin.com