

**Part Number:** Y-FJ09-(E)

**Description:** Dual Seat

**Fitment:** 2015 Yamaha FJ-09

**Revision:** 1




Tools Required	Parts List
10mm socket wrench	1 Wiring Harness Fuse Link 12"

**NOTE:** The Corbin dual saddle is **NOT** height adjustable. Instead, we've made the saddle with the best ground reach possible and designed it to fit perfect with the Yamaha body work.

**NOTE:** If you're installing a heated seat model, skip ahead to the electrical installation portion of this sheet before mounting your new dual saddle.

1. Remove stock seat.
2. Remove the plastic seat bracket assembly used with installation of the stock seat and set aside, you won't need this for the Corbin saddle. (*Figure 1*)

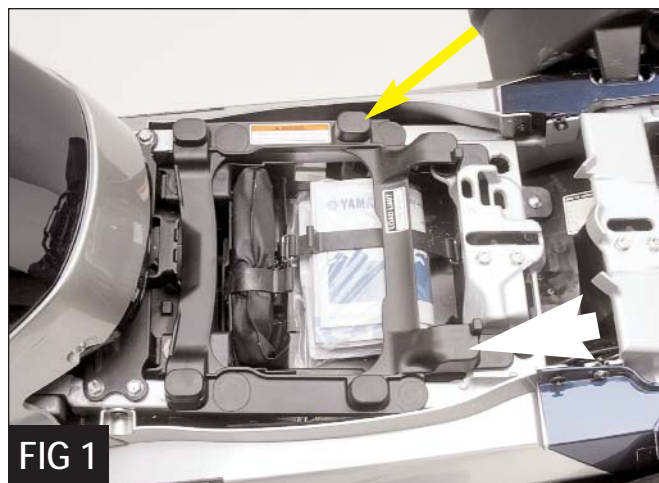

3. To install your dual saddle, tuck the wires away to prevent them from pinching, slide the front tongue forward into the lower position (*Figure 2*) and align the rear of the seat to the stock locking mechanism and push down until you hear it click.

**NOTE:** You may need to give a firm pat to engage.


#### ELECTRIC HEAT INSTALLATION:

1. Using a 10mm socket wrench, disconnect the battery negative terminal then disconnect the battery positive terminal. Attach the positive wire to the battery, then attach the negative wire to the battery. (*Figure 3*).
2. Plug the wiring pigtail on the Corbin saddle into the wiring harness you just installed. Flip the switch on the saddle. If the switch illuminates, the saddle heater is working.



**NOTE:** The heater is controlled by the switch along the side of the saddle. The temperature is regulated by an internal thermostat when the heater switch is turned on.

3. To install your dual saddle, see instructions above.

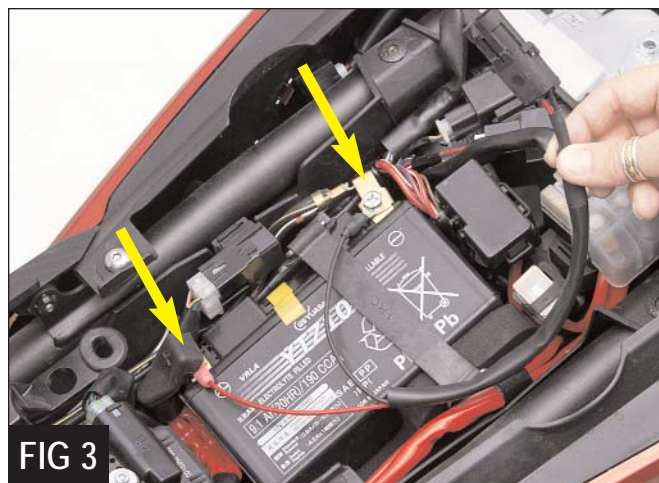

Questions? Give us a holler...  
**800-223-4332**  
tech@corbin.com